


PHA-48: Pragmatic Line Array Speaker

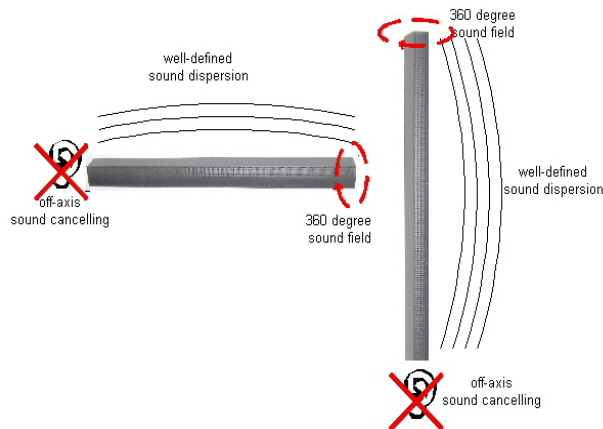

Power Handling: 100-Watts RMS Continuous, 300 Watts RMS peak
Colors: protective metal grill in silver, white, black and other custom colors
Dimensions: 72" W x 2" H x 2" D
Weight: 11 lbs Approx.
Frequency Response: 120 Hz – 20 KHz
Impedance: 4 Ohms

The PHA-48 contains 48 high performance, full range drivers which offer a well-defined dispersion pattern with no hot spots. The speaker is designed to specifically match 72" plasma and LCD TV units used in industrial, commercial, and residential home theater applications.

The speaker is easily mounted horizontally or vertically on a wall or ceiling with the built-in backing. When positioned horizontally, the signal drops-off dramatically off-axis while maintaining a very uniform sound field in the vertical dimension. If mounted vertically, it offers uniform sound field 360 degrees around the speaker, making it an ideal unit for mounting in public venues.

Additional options include an integrated amplifier and a PADS™ or TPA receiver. So whether you are looking for a high performance speaker in a hotel, restaurant, theme park, or department store for an audience of a few or a few thousand, the exceptional sound quality from PHA-48 will be suitable for all needs within the A/V market.

Copyright © 1994- 2007. All rights reserved.

Pragmatic Communications Systems, Inc.

2934 Corvin Drive, Santa Clara, CA 95051, USA

Tel. (408) 735 0300

Fax. (408) 735 0800

www.pragmatic1.com

Applications:

Residential home theater applications
Digital Signage with plasma and LCD
TV units
Applications in hotels, fitness clubs,
restaurants, theme parks, museums,
shopping malls, grocery stores, etc.

Features and Benefits:

48 full range drivers
Efficient energy consumption
Integrated amplifier option available
PADS™ or TPA receiver option
available
CE Compliant
Offered in a multitude of colors



Architect Specifications:

The unit shall be a line array speaker that measures 72" W x 2" H x 2" D and be housed within a protective metal grill. It shall weigh approximately 11 pounds. The unit shall have 48 drivers compiled in a line array design. Its power handling will be 100-Watts RMS Continuous, 300-Watts RMS peak and have a frequency response of 120 Hz to 20 KHz. It shall be able to match a 72" plasma or LCD TV screen. It shall have the option of an integrated amplifier and a PADS™ or TPA receiver.

The speaker shall be the Pragmatic PHA-48 Line Array Speaker.

Copyright © 1994- 2007. All rights reserved.

Pragmatic Communications Systems, Inc.

2934 Corvin Drive, Santa Clara, CA 95051, USA

Fax. (408) 735 0800

Tel. (408) 735 0300

www.pragmatic1.com